

ILK CANTILEVER LIFT

2200, 3300, 4400, 5500 and 6600 lbs. Capacity

MBB PALFINGER



**—OPTIMIZED—
FLEXIBILITY
DURABILITY
PROFITABILITY**

Designed to provide you a tailgate, a rear door and an adjustable dock plate, it's built for years of hard use. The adjustable platform enables safe and smooth handling in a variety of terrains.



HEAVY DUTY CONSTRUCTION

- Bushings and zerks at all pivot points
- Ground rollers on platform
- Three piece rear impact guard
- Thermo protected PowerPack pre-installed, wired and filled with high-grade hydraulic fluid
- 105 degree tilting platform maintains level through operation


BUILT IN STANDARD/ SAFETY FEATURES

- (4) Cylinder design with hydraulic locks on cylinder ports
- Cab shut off switch
- 150 AMP circuit breaker
- Solid state, programmable control system offers improved operation and fast installations
- True level ride with ground tilt
- Low maintenance bushings

Our wide lift arms clears pintle hitches and allows installation on wide trailer frames with minor modifications. This lift works very well in double applications.

Mount frames are shipped preassembled with a three piece rear impact guard and complete with the electrical and hydraulic system to insure a fast quality installation.

The stout construction together with the (4) cylinder hydraulic system coupled with cylinder locks placed directly at the port, restricts hydraulic pressure to only the cylinder. These features provide additional stability and safety for the operation.



The added convenience of automatic leveling allows the platform to find horizontal position on its own as well as tilt down at the ground only if the operator is still activating the controls. With this feature, the operator does not need to adjust the tilt angle manually.




Lockable control boxes are pre-wired and tested. We offer (3) different control stations:

- Side control
- Hand held remote
- Optional foot controls in the liftgate platform



Our large ground roller eliminates wear on clevis and platform components when platform touches the ground maximizing your investment by reducing maintenance costs.

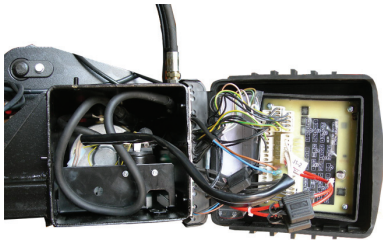

The pre-mounted PowerPack is fully enclosed in our mount tube for fast installation and slides out for easy inspection. This lockable mounting system keeps the PowerPack safely out of harms way. Oversized and thermo-protected quality components minimize maintenance and down time.

LIFTGATE OPTIONS

- ☐ Cart stops
- ☐ Flip up door
- ☐ Aluminum platforms
- ☐ Foot controls
- ☐ Auxiliary truck and trailer kit
- ☐ Custom made platforms
- ☐ Reinforced platform
- ☐ Full door seal kit
- ☐ Swing door kit
- ☐ Rear advertising covers
- ☐ Wireless Remotes
- ☐ 102" wide platforms

| Model | Lifting Capacity (lbs) | Platform Length (inches) | Platform Width (inches) | Bed Height (inches) | Approx. Weight (lbs) | Mount Clearance (inches) |
|--------|------------------------|--------------------------|-------------------------|---------------------|----------------------|--------------------------|
| ILK 22 | 2200 | 48 & 60 | 94, 98 | 30 - 49 | 690 | 26 - 35 |
| ILK 33 | 3300 | 48, 60, 72, 84 | 94, 98 | 36 - 55.5 | 1190 | 26 - 40 |
| ILK 44 | 4400 | 48, 60, 72, 84 | 94, 98 | 36 - 55.5 | 1300 | 26 - 40 |
| ILK 55 | 5500 | 48, 60, 72, 84 | 94, 98 | 36 - 55.5 | 1400 | 26 - 40 |
| ILK 66 | 6600 | 72, 84 | 94, 98 | 40 - 60 | 1650 | 29 - 40 |

Applications shown in the leaflet do not always correspond to the standard specifications. Design and specification are subject to change without prior notice.