



# ProStake Platform Bodies

## STANDARD FEATURES

### SUBFRAME

- High-Strength 3" I-beam crossmembers on 16" centers
- External rubrail and side pockets
- 6" structural channel longrails

### BULKHEAD

- Re-engineered to require less parts
- Standard welded design
- Punched window
- Painted heavy-duty bulkhead with 4 vertical steel posts
- Standard 42" height and Optional 48" height
- Bulkhead designed to accommodate cab-extension and retractable tarp

### LIGHTING

- Standard LED body clearance / ID lighting
- Molded harness and sealed plug-together connections
- Minimized lamp housing size
- Grommet mount


### FUEL FILL

- Self-supporting, frame-mounted design
- Integrated with mudflap supports
- Steel fill neck mounting bracket

### MUDFLAPS

- Frame mounted design
- Anti-sail braces

Morgan designed its standard 42" bulkhead for maximum durability; while a punched window enhances overall safety.

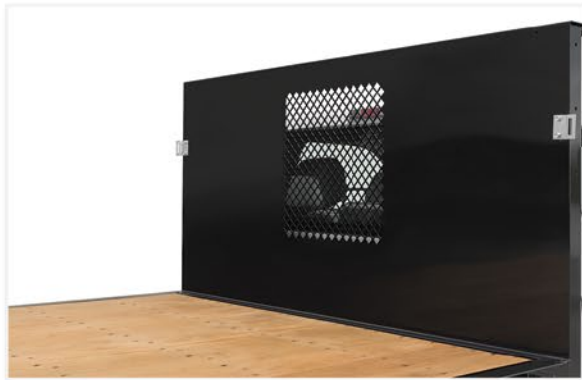

Three-inch I-beam frame construction delivers superior strength and durability. Positioning crossmembers 16 inches on-center reduces weight for better fuel efficiency.



Deep pocket design provides solid seating of upright stake racks; making it easy to secure your load during transport, and remove racks for loading and unloading.



Heavy-duty Apitong wood flooring comes standard on all ProStake bodies, and offers natural shock absorption, weather and insect resistance.



A standard, heavy-duty rub-rail helps to protect the flatbed frame and side rail pockets from minor impacts.



www.anjerinc.com  
800-326-5373  
sales@anjerinc.com