


HLF SERIES FLIPAWAY GATE



2,500 lb., 3,000 lb., 4,000 lb., and 5,000 lb. Capacities


Waltco's HLF - (heavy duty, level ride flipaway) liftgate model. Our HLF offers simplified design and maximum performance for a variety of truck and trailer applications.

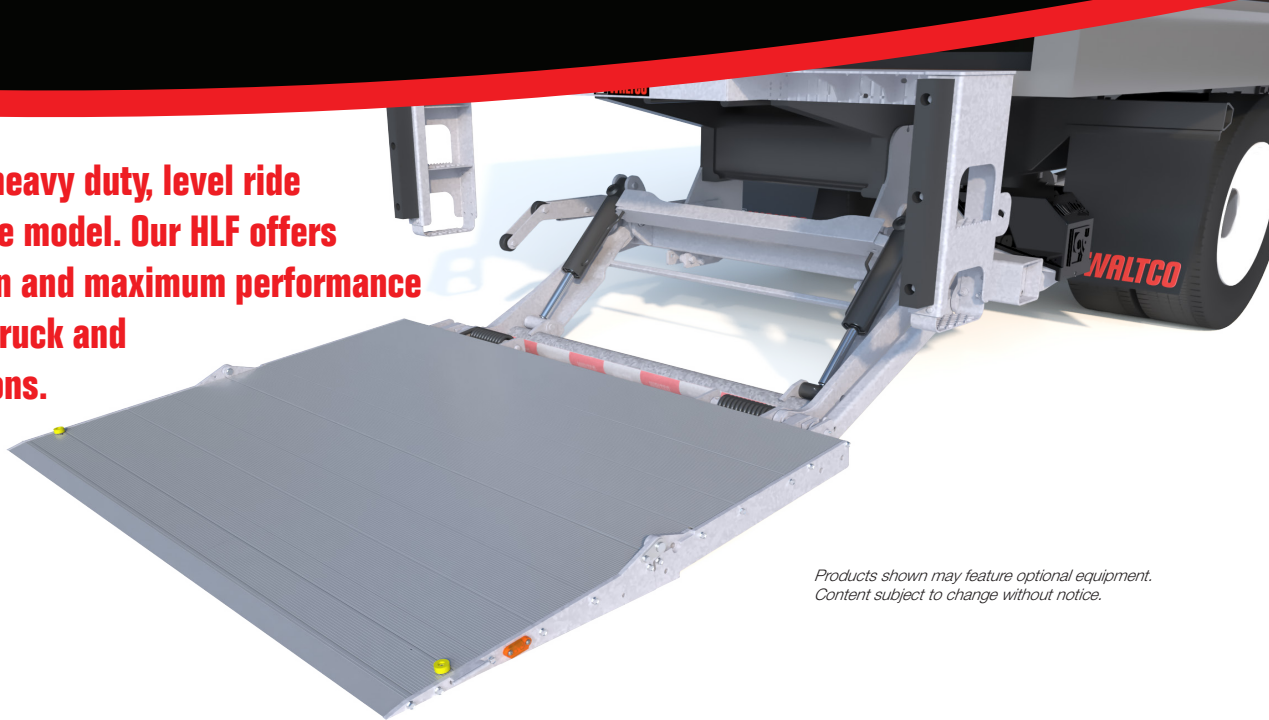

*Products shown may feature optional equipment.
Content subject to change without notice.*

STANDARD HLF SERIES ADVANTAGES INCLUDE:

- 60" x 84" Knurled aluminum platform provides large work area for handling pallet loads
- Galvanized steel components
- Faster operating speeds increase productivity
- Retracted and protected lift cylinders in the transit position
- Bolt-on ready, heavy-duty, reinforced thick bed extension
- New rocking pivot hinge minimizes digging into and damaging concrete or asphalt
- Simplified maintenance:
 - External pump for easy access
 - Grease fittings at all major hinge points
 - Nitro hardened pin with increased bearing reduces maintenance and downtime
 - Dedicated 2 gauge copper ground improves electrical component life
 - Bolt-on parting bar
- Molded & potted toggle switch
- Power down
- Bolt-on, two-step dock bumpers with 21" UHMW bumper pads
- Lock valves incorporated on lift cylinders
- Adjustable bolts to control platform pitch
- Torsion-assist platform extension

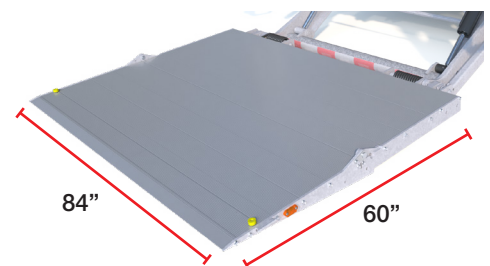

60" deep x 84" wide knurled aluminum platform with individually replaceable extrusion provides a large work area for handling pallet loads and service ability.



Industry leading, standard heavy-duty thick bed extension with reinforcing angle offers greater strength. It's bolt-on ready with adjustable two-step dock bumpers and UHMW bumper pads to protect both the dock and liftgate from rubbing damage.


HLF SERIES FLIPAWAY GATE

Bed Ht: 46"-60"


SPECIFICATIONS:



54" of useable platform depth with cart stops deployed.



Simplified rocking pivot hinge reduces damage to concrete or asphalt that rollers may cause.



Lift cylinders store in a retracted position behind protective plating, shielding them from road debris that causes pitting.



Optional walk ramp can be operated without moving the liftgate.

Model	Capacity	Platform	Ramp	Weights
HLF/AP-25	2,500 lbs.	60" x 84"	Wedge	1114 lbs.
HLF/AP-30*	3,000 lbs.	60" x 84"	Wedge	1114 lbs.
HLF/AP-40	4,000 lbs.	60" x 84"	Wedge	1352 lbs.
HLF/AP-50	5,000 lbs.	60" x 84"	Wedge	1352 lbs.

Notes: Walk Ramp / "WR" fits bed height 49" (laden) to 60"

OPTIONAL EQUIPMENT:

- Solar charging
- Wire rope step
- Auxiliary power kits for straight trucks and trailers
- Lights for dock bumpers
- Dual cart stops - 54" of useable platform depth with cart stops deployed
- Walk Ramp version of bed extension (ramp can be operated without moving the liftgate)
- Bolt-on FMVSS/CMVSS 223, 224-compliant under ride
- Hand-held Pendant Control to allow operation of the liftgate from ground or bed level
- Dual Controls for street-side or curbside operation
- Swing Door Compatible Bed Extension - this patented design allows the HLF to be mounted onto vehicles with swing doors
- Cab-mounted Power Shut-off Switch - allows operator to shut off power to liftgate control switch(es) to prevent unauthorized use
- Reinforced bed extension
- Customized options



www.anjerinc.com

800-326-5373

sales@anjerinc.com